


PRO MINI PINOUT

RAW When supplying unregulated power to the board, be sure to connect to this pin

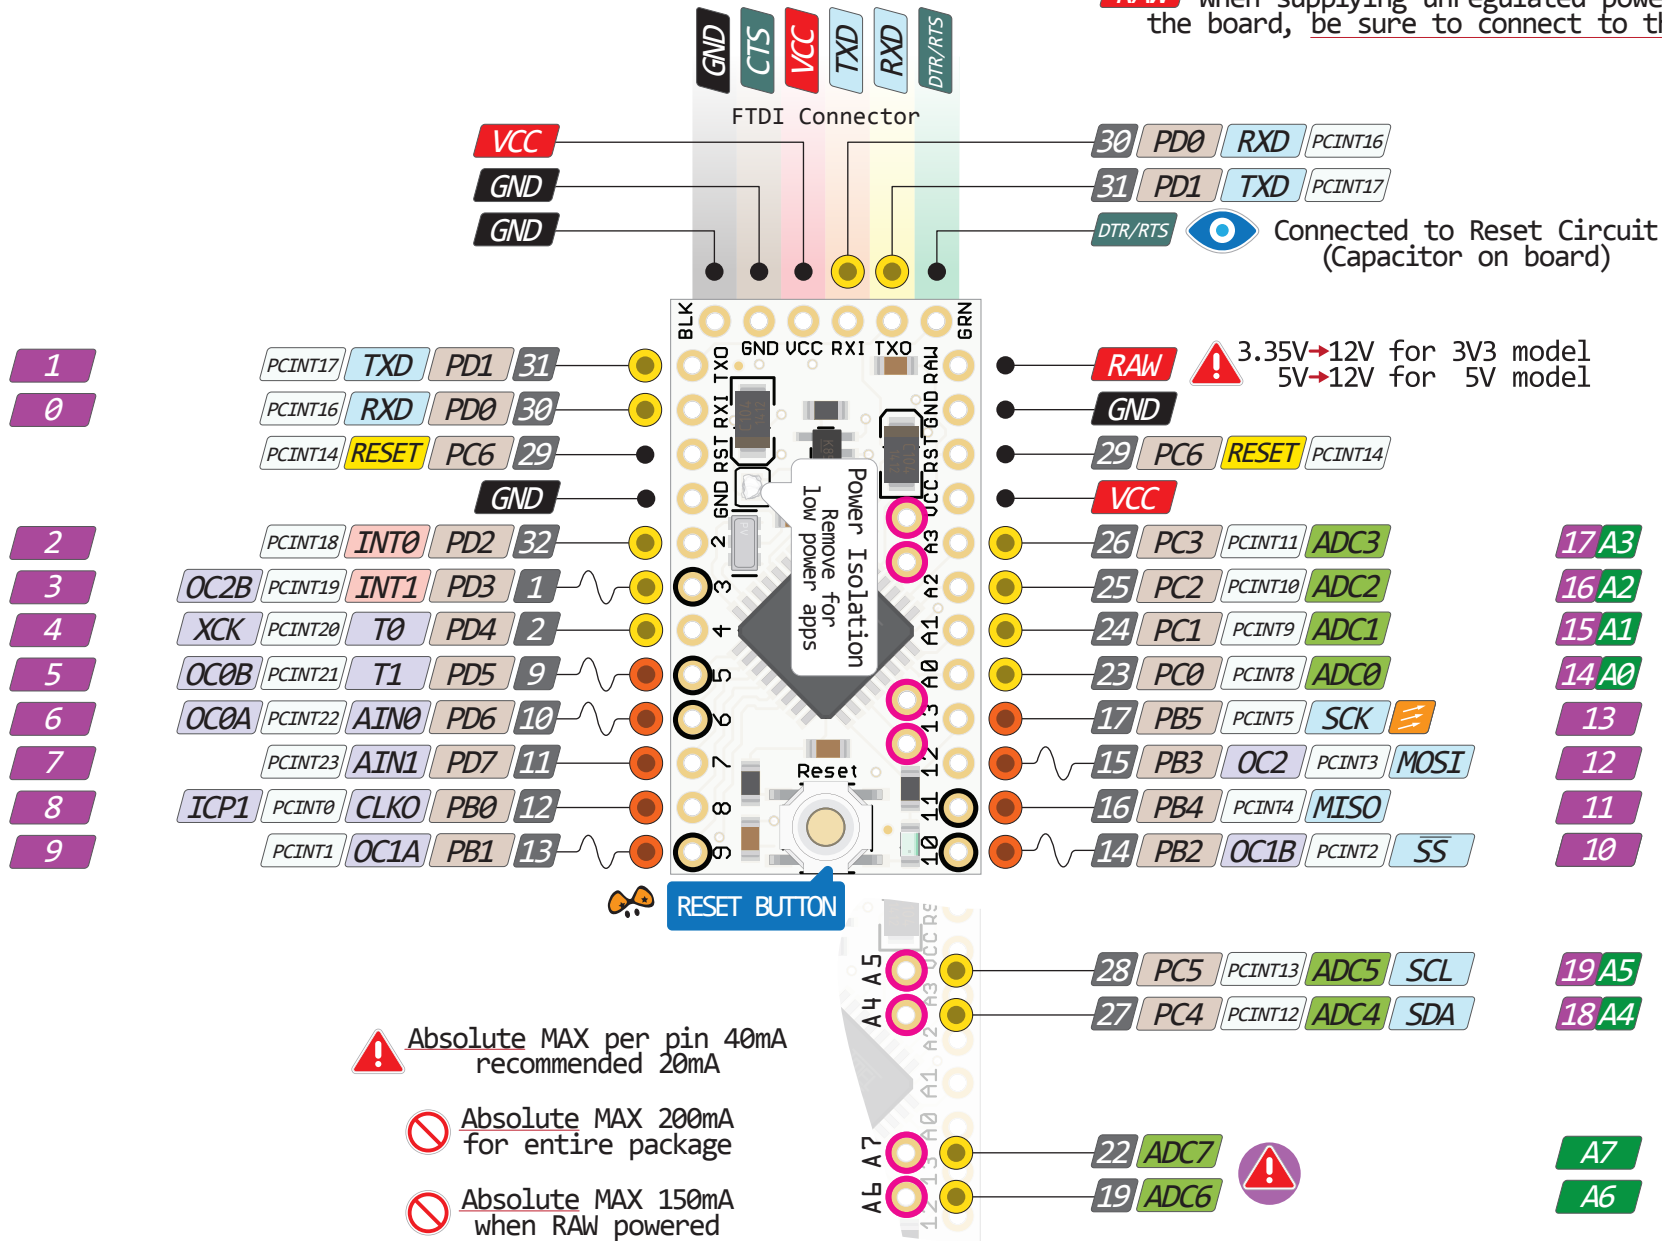

- IDE
- Power
- GND
- Serial Pin
- Analog Pin
- Control
- INT
- Physical Pin
- Port Pin
- Pin function
- Interrupt Pin
- PWM Pin
- Port Power

The power sum for each pin's group should not exceed 100mA

Absolute MAX per pin 40mA recommended 20mA

Absolute MAX 200mA for entire package

Absolute MAX 150mA when RAW powered

Analogue exclusively Pins